



TECNAM P2008 TC

Turbocharged power speeds the Tecnam P2008 TC

THIS TURBOCHARGED TECNAM P2008 offers several hints of where general aviation may be headed in the future. It brings together less costly construction techniques (metal wings and carbon fiber fuselage) and is certified under less costly rules. On the panel are dramatically less expensive avionics. Some think aircraft like this one may populate flying clubs and rental fleets decades from now, after current four-place, \$400,000 airplanes inflate their way up to \$1 million.

LUXURY LEVEL LSA



VIDEO EXTRA
Fly along with
the author in
this online video.

BY ALTON K. MARSH | PHOTOGRAPHY BY CHRIS ROSE



That's not to say that everyone in the future will have \$219,000 in discretionary money to purchase a luxury-level Tecnam P2008 TC. (Tecnam models are named for the year they were designed.) This one is tricked out with a triple-screen Garmin G3X glass cockpit displaying traffic and weather, and even a backup electronic flight instrument system by an Italian company called Flybox. You can purchase a P2008 for far less, but it won't be turbocharged. The base price for a P2008 with analog flight instruments, an iPad mini for your moving navigation map, and no turbocharger is \$146,500. The turbocharger package includes a three-blade Sensenich propeller and adds \$24,900. That Flybox Oblò (*Oblò* means porthole in English) backup offers—in a three-inch space—an attitude indicator, a turn-and-bank indicator, an altimeter, a vertical speed indicator, an airspeed indicator, a G-meter, a magnetic heading or GPS tracking heading, and a pressure reference. It costs \$2,300.

P2008 TC CLAIMS TO FAME

Looking like a mini-Cessna 172, the turbocharged P2008 promises a smooth-running Rotax 914 engine and 117 knots true airspeed at 9,000 feet. Tecnam North America CEO Phil Solomon said that was his average speed on a recent flight at 9,500 feet. Smoothness comes from turbocharging the 80-horsepower Rotax 912 to produce 115 horsepower—the engine has lower compression than the 100-horsepower model—as well as from the three-blade propeller and shock-absorbing rubber engine mounts found in Tecnam's more expensive models.

Slide the throttle past a detent and a computer will set the engine power to 115 percent, but that setting is limited to five minutes. Still, the engine's computer takes advantage of turbocharging at nearly any power setting. Solomon said he recently maintained a climb rate of 1,300 feet per



AN LED READING LIGHT (above) and a 12-volt power supply (above center) show attention to detail. The owner opted for a three-screen Garmin G3X system, although one- and two-screen options are available.

minute—even without maximum power—all the way to a cruising altitude of 9,500 feet. The 914 engine is often chosen for seaplanes and aircraft operating at high elevations or in hot climates.

The panel offers a third outstanding feature of this P2008 TC, the Garmin GMC 305 autopilot. The autopilot allows this particular airplane to make coupled instrument approaches and can even control indicated airspeed. Solomon points out that Light Sport aircraft are limited to visual weather conditions. The autopilot also has an emergency “level-recovery” attitude button to literally right a pilot’s wrongs.

SMOOTH OPERATOR

To its credit, the Sebring, Florida, Chamber of Commerce website does not promise a

sunny warm day, only that there is a “mild” climate at an unspecified time. The air-to-air photography flight was conducted under miserable gray skies in heavy-jacket temperatures, making photographer Chris Rose’s job difficult in dull light and chilly weather. The occasion was the U.S. Sport Aviation Expo in January.

Tecnam gets an “A” for the claim that the engine is smooth. The 100-horsepower Rotax 912 engine is known for starting and stopping with an abrupt shudder. The 914 is more like engines found on four- and six-seat piston-engine aircraft. Photos on the ground required spinning the aircraft through tight turns to aim towards the imaginary sun. The free-castering nose-wheel provided the only problem seen during the aircraft test. As the aircraft

IN THE PANEL

Garmin G3X flight display triple-screen system with angle of attack indicator


Garmin GMA 240 audio panel with phone, radio, and music

Garmin GNC 255 nav/com linked to the G3X

Garmin GMC 305 autopilot controller with emergency level-flight recovery

Garmin GTX 23 ES transponder with ADS-B and traffic information



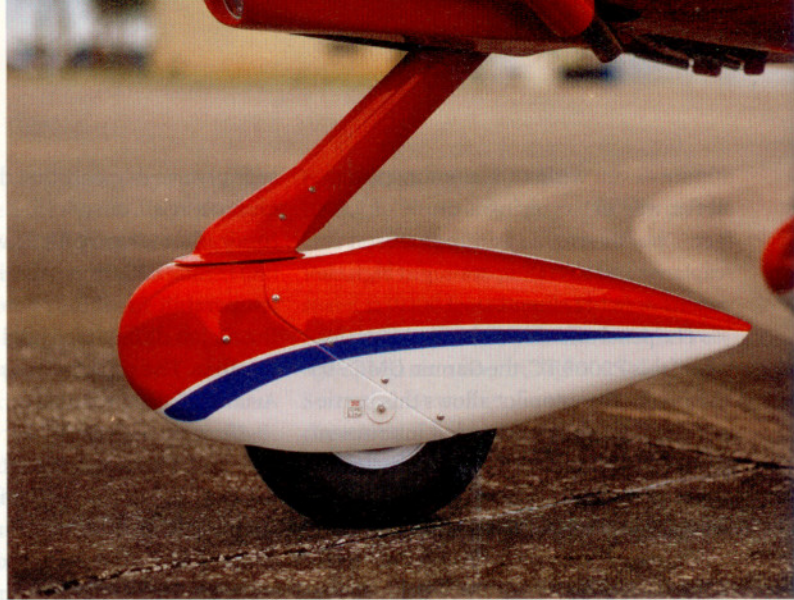

It's small, leading some to call all Light Sport aircraft "toys," but if you're out playing in the sky, toys are what you need.

turned left I stopped, held the toe brakes, and explained to Tecnam's Solomon, "I was trying to turn right." He deftly commanded the aircraft to the right, but said he felt the nosewheel needed an adjustment that was later made prior to delivery.

Takeoff, as with most Light Sport aircraft, requires a slight back pressure on the stick to lessen the load on the nosewheel and a light touch overall. These small aircraft are more responsive than even their four-seat kin. Rotation is at 48 knots indicated airspeed, while the best rate of climb is between 70 and 80 knots. Catching up to the lead aircraft, a Cessna 210 that had slowed for the Tecnam, I radioed to the pilot that he could power up because I was at half throttle. There was no concern about operating the turbocharger since there was nothing to do. A computer takes care of the turbocharger (a red light will come on if you exceed five minutes at maximum power), leaving only a single lever for power; there's also no fuel mixture control; and, of course, no propeller control, since the propeller is not allowed to be adjusted in flight on Light Sport aircraft. Propeller adjustments are made on the ground. The electric flap control has just three positions: 0 degrees, takeoff (15 degrees), and landing (40 degrees). The single power lever and simple flap control, along with stick-mounted electric trim buttons and a push-to-talk switch, kept the workload light.

In flight the engine kept its smooth reputation, with the carbon-fiber fuselage helping to dampen sound. The aircraft flew as if the autopilot was on, although it was of course not used in formation. Rose mentioned that the P2008 TC stuck to its position while he recorded video for this article from the lead aircraft, but I was making no control inputs at the time, just sitting there. Although the wing is mounted above the cabin, visibility is excellent.

Light Sport aircraft can get testy during landing. Limited to 1,320 pounds (more for seaplanes), they lack the mass to keep floating if power is reduced to idle just above the runway. Instead of having several seconds to raise the nose for a soft touchdown, the pilot finds he has no time at all—and a

SPEC SHEET Tecnam P2008 TC

BASE PRICE: \$171,400
PRICE AS TESTED: \$219,000

SPECIFICATIONS

Powerplant | **115 hp turbocharged Rotax 914 UL**
Recommended TBO | **2,000 hr**
Propeller | **68 in, 3 blade Sensenich**
Length | **22 ft 8 in**
Height | **8 ft 1 in**
Wingspan | **29 ft 6 in**
Wing area | **131 sq ft**
Wing loading | **10.1 lb/sq ft**
Power loading | **11.5 lb/hp**
Seats | **2**
Cabin length | **3 ft 11 in**
Cabin width | **3 ft 7 in**
Cabin height, seat to headliner | **2 ft 11 in**
Empty weight | **783 lb**
Empty weight, as tested | **884 lb**
Max gross weight | **1,320 lb**
Useful load | **537 lb**
Useful load, as tested | **436 lb**
Payload w/full fuel | **373 lb**
Payload w/full fuel, as tested | **272 lb**
Max takeoff weight | **1,320 lb**
Fuel capacity, std | **27.5 gal**
(**27.4 gal usable**)
165 lb (164 lb usable)
Baggage capacity | **44 lb**

PERFORMANCE

Takeoff distance, ground roll | **607 ft**
Takeoff distance over 50-ft obstacle | **1,007 ft**
Max demonstrated crosswind component | **15 kt**
Rate of climb, sea level | **1,100 fpm**

firm landing is the result. I was prepared to leave a little power on to touchdown if necessary to avoid that, but needn't have bothered. The approach was made at 65 knots indicated airspeed. Even with power at idle just above the runway there was no sudden increase in sink rate. It made me look good.

Obviously this aircraft is nicer than it needs to be, and therefore more expensive, but not if it is to compete in the luxury end of the market. It's small, leading some to call all Light Sport aircraft "toys," but if you're out playing in the sky, toys are what you need.

AOPA

EMAIL alton.marsh@aopa.org

Max level speed, sea level | **120 kt**
Cruise speed/endurance w/45-min rsv, std fuel (fuel consumption) 4,000 ft
@ 72% power, best economy
109 kt/3.7 hr (31 pph/5.1 gph)
@ 52% power, best economy
93 kt/7.7 hr (17 pph/2.8 gph)
Service ceiling | **16,000 ft**
Landing distance over 50-ft obstacle | **1,200 ft**
Landing distance, ground roll | **515 ft**

LIMITING AND RECOMMENDED AIRSPEEDS

V_x (best angle of climb) | **65 KIAS**
 V_y (best rate of climb) | **78 KIAS**
 V_A (design maneuvering) | **98 KIAS**
 V_{FE} (max flap extended) | **68 KIAS**
 V_{NO} (max structural cruising) | **106 KIAS**
 V_{NE} (never exceed) | **134 KIAS**
 V_R (rotation) | **48 KIAS**
 V_{SI} (stall, clean) | **45 KIAS**
 V_{SO} (stall, in landing configuration) | **39 KIAS**

For more information, contact Tecnam North America, 11152 Air Park, Ashland, Virginia 23005, telephone 804-798-6500, <http://tecnam.net>, e-mail info@tecnam.net.

All specifications are based on manufacturer's calculations. All performance figures are based on standard day, standard atmosphere, sea level, gross weight conditions unless otherwise noted.

EXTRA

Speed is a key selling point for this luxury light sport.

A THREE-BLADE ground-adjustable propeller (opposite page, top left) comes standard with the turbocharged engine. The LED landing light is positioned below the engine to avoid flooding the cockpit with light, as do some wing-mounted landing lights. The tail (below left) has platforms for a beacon and rear navigation light, not needed when Aviolights are used on the wing tips that include rear-facing elements.